

Fast Inflation Shelters

SKU -40020994

Sealed Beam Fast Inflation Shelter

DESCRIPTION

The 'ICB Air' series Sealed Beam Fast-Inflation Shelter from I.C. Brindle—a swift-deployment solution crafted from flame-retardant, waterproof, and water-repellent materials. Our 'Mk III' shelters feature vehicle flaps, triple-layer windows, and connectable zips as standard, with CAD customization available. Constructed from tough FR canopy fabric and 1140g/sqm Black Plato PVC, these shelters offer durability and resilience. Transparent PVC windows ensure visibility, while over pressure valves facilitate easy setup. Ideal for challenging environments, our shelters combine rapid deployment with exceptional performance.



Supplied with:

- 3-layer windows
- Service port at each end
- Clear PVC pouch at each door
- Carry bag with four handles
- Full repair kit and heavy-duty stakes included



Customisation:

- Canvas Colour
- Logos and Branding
- Additional windows / doors + location
- Heating and Lighting options

1

www.icbrindle.com

+44 (0) 1202 657814

info@icbrindle.com

Follow us on :





Fast Inflation Shelters

SKU -40020994

Sealed Beam Fast Inflation Shelter

KEY FEATURES

- Flame-retardant canopy
- Waterproof with glued, stitched, and taped seams
- Welded beams, 250mm-330mm acc. to shelter size
- Large vehicle flaps for hard surface anchoring
- Windows on each side with fly mesh
- Clear PVC covers for light and privacy
- Connectable full-sized doors
- Connectable shelter zips
- Inflation/deflation valves with over pressure valve
- Pressure sensor valve for continuous regulation
- All valves located in a row on outside of shelter
- 'D' rings for accessory attachment
- Service port at each end
- Full repair kit and heavy-duty stakes included
- Yellow and black chevron design at entrances
- Rain gutter around doors
- Carry bag with four handles
- Clear PVC pouch at each door

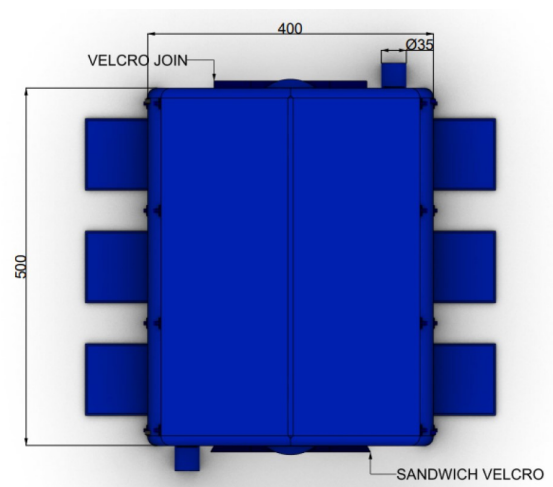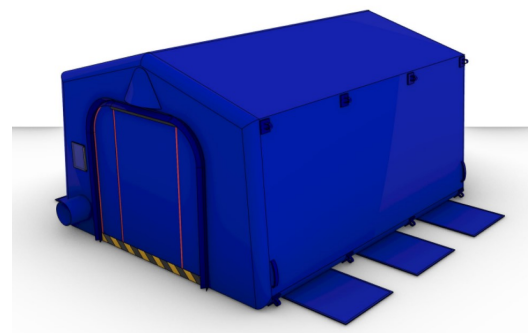

CAD + Dimensions (Example shown above is based on a 4x5m Shelter)

Fast Inflation Shelters


SKU -40020994

Sealed Beam Fast Inflation Shelter

SPECIFICATION

Product Code	ICB33	ICB34	ICB44	ICB45	ICB56	ICB58	ICB68
Shelter (m)	3x3m	3x4m	4x4m	4x5m	5x6m	5x8m	6x8m
Length (cm)	300cm	300cm	400cm	400cm	500cm	500cm	600cm
Int. Length (cm)	300cm	300cm	400cm	400cm	500cm	500cm	600cm
Width (cm)	300cm	400cm	400cm	500cm	600cm	800cm	800cm
Int. Width (cm)	250cm	350cm	446cm	446cm	543cm	734cm	734cm
Height (cm)	260cm	260cm	270cm	270cm	280cm	300cm	300cm
Int. Height (cm)	235cm	235cm	243cm	243cm	251.5cm	267cm	267cm
Beam Size (cm)	25cm	25cm	27cm	27cm	28.5cm	33cm	33cm
Working Pressure (mbar)	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Packed Size (cm)	0.9x0.69x0.61m	0.9x0.69x0.61m	1x0.76x0.67m	1x0.76x0.67m	1.1x0.80x0.74m	1.1x0.80x0.74m	1.2x0.80x0.74m
Weight (kg)	60kg	64kg	70kg	75kg	85kg	95kg	105kg

CAD + Dimensions (Example shown below is based on a 4x5m Shelter)

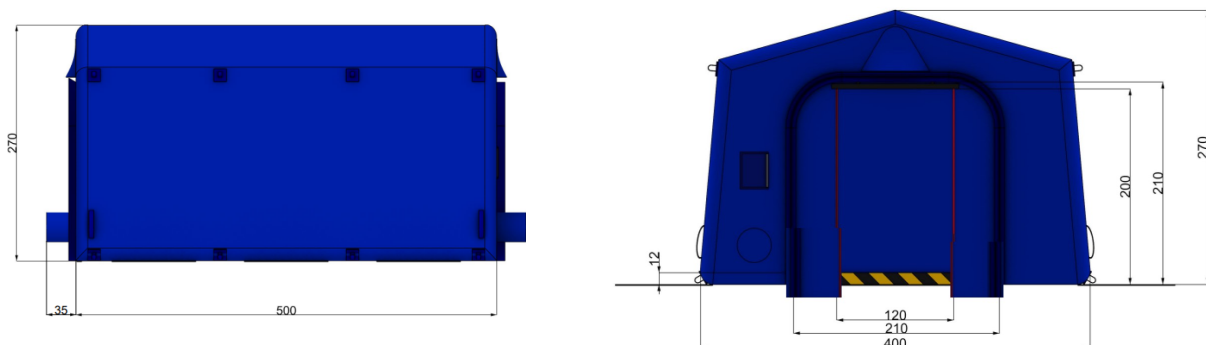

Fast Inflation Shelters

SKU -40020994

Sealed Beam Fast Inflation Shelter

INFLATION OPTIONS

The Fast-Inflation Shelter offers a comprehensive selection of inflation and deflation pumps, each designed to meet specific needs and preferences. from the portable Bravo Turbo Max 12V Electric Pump ideal for professional use, to the versatile Bravo GE OV10 110V and 230V pumps, each equipped with anti-sand filters for smooth operation in challenging environments.

For maximum performance, the Bravo 230V 230/2000 Pump combines a main motor with a booster motor, offering rapid inflation capabilities perfect for larger structures like our 4mx5m and above inflatable shelters—which can be fully inflated in under 5 minutes.

The GE 120/2000 A.R.S. Electric Pump takes convenience to the next level with its Automatic Refilling System, ensuring consistent pressure levels without the need for manual monitoring or adjustments. With adjustable pressure settings catering to various requirements, these pumps and cylinders Guarantee peak performance for the our sealed-beam fast inflation shelters, providing efficiency and reliability when it matters most.

Bravo GE OV10 230V



12v Bravo Turbo Max



Bravo GE OV10 110V



Bravo GE OV10 230V



GE 120/2000 A.R.S.



Cylinder Inflation Hose System





Fast Inflation Shelters

SKU -40020994

Sealed Beam Fast Inflation Shelter

NOTES