

# INFLATABLE SHELTER ACCESSORIES

SKU - 40120012

## LI-ION LED LIGHTING

SKU - 4120011

### SETO COMBAT X2— RECHARGEABLE LIGHTING

#### Immediately Available, tactical Light for tents and Containers

Thanks to the latest generation of high-performance LEDs, enormous light potential has been achieved in an extremely compact design. Thanks to state-of-the-art lithium ion battery technology, multi-hour use is possible even where no power source is available.

In addition to the strong light and the long lighting duration, the **SETO COMBAT** also allows tactical switching between light colours , cool, warm and neutral white, depending on the application

The direction of light (lateral or central radiation) can be controlled independently as well. In each light colour and light direction, the intensity can also be switched in three stages – the result is perfect, homogeneous illumination in the demand area.

The **SETO COMBAT** first becomes a universal task light due to its flexibility. Two integrated mounting points on the back and front sides allow quick fixation with the enclosed hooks or carabiners, e.g. on poles or ropes. Thanks to side straps, belt mounting is also possible.



## SETO COMBAT X2

- ✔ Highly flexible, tactical light
- ✔ Color switching and dimming function
- ✔ Up to 4.000 lumens
- ✔ 7.5 - 78 h battery life
- ✔ Dimensions 296 x 100 x 36 mm
- ✔ Power bank function

Item no: 1424000022

822  
gIP54  
IP CODE

1


[www.icbrindle.com](http://www.icbrindle.com)


+44 (0) 1202 657814


[info@icbrindle.com](mailto:info@icbrindle.com)

Follow us on :



<b>General Data</b>	Electrical data	Lighting data
Model	X1	
Dimensions	229x100x36 mm	
Weight	0,598 kg	
Front Window	Milky	
IP Class	IP54	
Light Functions	Dimmable, ww/nw/cw Switch, Powerbank	
Brand	SETO	
Series	COMBAT	


General Data	<b>Electrical data</b>	Lighting data
Input Voltage	12,6 V	
Type of Current	DC	
Protection Class	III	
Operating Time (High Level)	6,5 h	
Operating Time (Low Level)	78 h	
Charge Time	3 h	
Charger	Li-ION, 3,6V, 15,600 mAh	

General Data	Electrical data	<b>Lighting data</b>
Luminant	LED	
Luminous Flux (real)	3.200 lm	
Colour Temperature	3000 / 4200 / 6200 K	

# INFLATABLE SHELTER ACCESSORIES

SKU - 40120012

## LI-ION LIGHTING

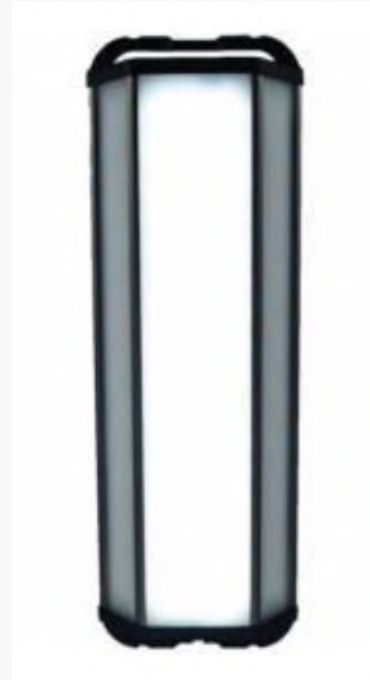

CW



WW



NW



# INFLATABLE SHELTER ACCESSORIES

SKU - 40120011

LI-ION LED LIGHTING

## ACCESSORIES & OPTIONS

- Shelter canopy colour
- Logos ( Screen printed onto Velcro patches)
- Additional Windows/Doors & Services points
- Room dividers
- Floor matting
- 110v and battery powered lighting
- Indirect and direct heating
- 110V and 230V Electric pumps
- 6l/300 bar fast inflation cylinders
- Manometers

