


Fire Isolator & EV Control

SKU - 40020419

Fire Isolator Aerosol Units

DESCRIPTION

The Aerosol Salt Potassium Unit is a lightweight, handheld device for the first responder in a fire situation, primarily for Class A, B, and C fires. Suitable for the control of Electric Vehicle Fires.

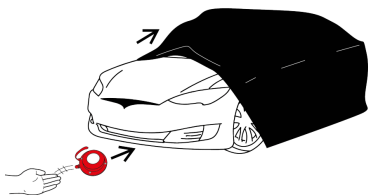

KEY FEATURES

- **Lightweight Handheld Device:** Easy to handle and deploy during fire emergencies.
- **Designed for Class A, B, and C Fires:** Versatile application across different fire types.
- **Activates Automatically Upon Deployment:** Minimises response time and enhances firefighting efficiency.
- **Reduces Heat and Minimises Water or Foam Usage:** Limits fire damage and residue, preserving property and contents.
- **Rapid Dispersal Within 40 seconds:** Swiftly controls fire spread and intensity.
- **Long Hold Time of 30 minutes:** Provides extended fire suppression capability after activation.
- **SNAP Listing by EPA:** Ensures compliance with environmental safety standards.
- **Ecologically Safe and Environmentally Friendly:** Reduces environmental impact during use and disposal.
- **Serviceable lifetime of 15 years:** Ensures long-term reliability and cost-effectiveness.
- **Storage Between +5°C / +40°C:** Suitable for a wide range of storage conditions, ensuring readiness in varying environments.
- **Delivered in Heavy-Duty Case:** Facilitates safe storage and transport, enhancing accessibility during emergencies.

1



Fire Isolator & EV Control

SKU - 40020419

Fire Isolator Aerosol Units

SPECIFICATION

- Dimensions - 80mm (W) - 72mm (D) - 135mm (H)
- Weight - 1650 gr
- Serviceable Lifetime - 15 Years
- Storage temperature - +5°C / +40°C max. humidity 80%
- Time unit activates once the pin is pulled - 6-8 Seconds
- Time until fully dispensed - 40 Seconds
- Tested by - British, US & Canadian Forces Navy
- 1 Set = 2 Salt Potassium Units and Carry Case

TECHNICAL INFORMATION

- Width: 405 mm
- Height: 135 mm
- Weight: 6.3 kg
- Volume coverage: Up to 45 m³ (1400 ft³)
- Hold time: Average 30 minutes, varies based on volume (in m³)
- Storage conditions: Between +5°C to +40°C, maximum humidity 80%
- Serviceable lifetime: 15 years
- Storage between +5°C / +40°C max. humidity 80%
- Volume coverage: up to 45M³ (1400ft³)
- Does not deplete oxygen levels
- SNAP listing by EPA
- Ecologically safe and environmentally friendly(O.D.P.=0, G.W.P.=0)

2

