


ICB LIFE RAFT SECURING STRAPS

STANDARD AND BESPOKE CONFIGURATION LIFE RAFT SECURING STRAPS

DESCRIPTION

Adjustable three-point securing strap for 6-25 person inflatable liferafts

- Two-point fixing to the cradle/deck on one side of the raft (usually the outboard side when the raft is stowed near to and parallel to the rail).
- Single-point fixing to the cradle/deck on the other side: it's here that the strap can be attached to a hydrostatic release unit (if required) via a pelican hook or Senhouse slip which is also available
- Tension is adjusted using the sliding bar.

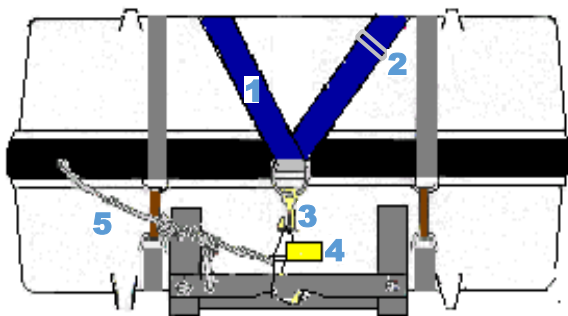

1. Securing Strap 2. Strap adjuster
3. Senhouse slip 4. HRU 5. Painter

SPECIFICATION

Standard configuration

- Webbing: 50mm terylene, breaking strain 1800 Kg
- D-rings and Adjuster Bar: 316 Stainless steel
- For use with 6-25 person inflatable life rafts
- Approximate weight for 1 x liferaft strap - 0.3kg
- Extendable from 1.2m—2.4m in length



ICB LIFE RAFT SECURING STRAPS

STANDARD AND BESPOKE CONFIGURATION LIFE RAFT SECURING STRAPS



Standard configuration



Standard configuration with Senhouse Slip



Standard configuration with Senhouse Slip
and deck mounting points



Bespoke arrangement

I.C. Brindle & Co Ltd are specialist manufactures of bespoke webbing arrangements, strops and harnesses.

We are able to manufacture life raft securing straps to your specification, if you are unsure of the correct securing strap for your situation we would be happy to design and supply a suitable solution.