

General Marine Equipment

SKU - 40020498


Anti-Slip Tape

An effective solution for preventing accidents and ensuring safety with the new Anti-Slip Tape from T-ISS. This tape is ideal for application on slippery surfaces, including stairs and walkways, both indoors and outdoors. Made of a mineral-coated plastic film, it features a pressure-sensitive adhesive that is protected by a removable liner. With its aluminium oxide mineral particles and solvent acrylic adhesive material, the Anti-Slip Tape provides excellent slip resistance. Moreover, it can be applied at a temperature range of 5 °C to 50 °C.



KEY FEATURES

- Anti-Slip Tape offers excellent slip resistance for safe working and walking environments.
 - Its mineral-coated plastic film and pressure-sensitive adhesive ensure durability and longevity.
 - The tape is suitable for both indoor and outdoor use, making it versatile and convenient.
 - Anti-Slip Tape can be applied in a temperature range of 5 °C to 50 °C, allowing for year-round use.
 - Its high-visibility design enhances safety by increasing awareness of potential hazards.
 - The tape is easy to install and remove, making it a cost-effective and low-maintenance solution.
- Anti-Slip Tape is a reliable and trusted product, ensuring peace of mind for its users.

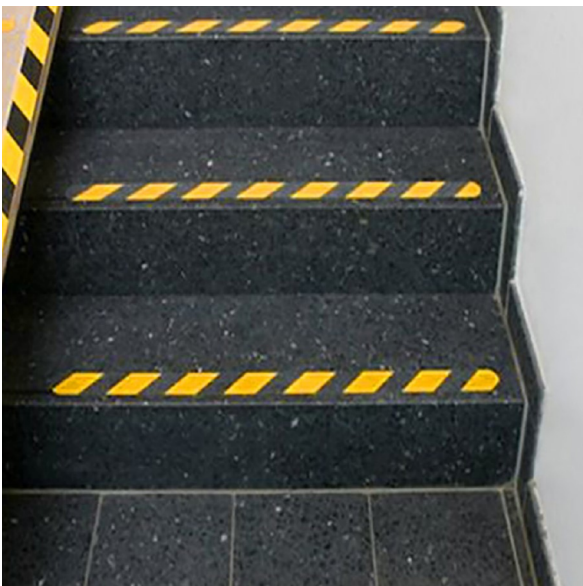

1





General Marine Equipment

SKU - 40020498

Anti-Slip Tape

SPECIFICATION

- Anti-Slip Tape offers excellent slip resistance for safe working and walking environments.
- Its mineral-coated plastic film and pressure-sensitive adhesive ensure durability and longevity.
- The tape is suitable for both indoor and outdoor use, making it versatile and convenient.
- Anti-Slip Tape can be applied in a temperature range of 5 °C to 50 °C, allowing for year-round use.
- Its high-visibility design enhances safety by increasing awareness of potential hazards.
- The tape is easy to install and remove, making it a cost-effective and low-maintenance solution.
- Anti-Slip Tape is a reliable and trusted product, ensuring peace of mind for its users.
- Thickness: 0,8 mm tape + 1 – 0,2 mm grit
- Steel adhesion: 1500 g / 25 mm
- Tensile strength: 6 kg / 25 mm
- Elongation / break: 2596
- Application temp: 5 °C up to 50 °C

TECHNICAL INFORMATION

- Thickness: 0,8 mm tape + 1 – 0,2 mm grit
- Steel adhesion: 1500 g / 25 mm
- Tensile strength: 6 kg / 25 mm
- Elongation / break: 2596
- Application temp: 5 °C up to 50 °C