

DESCRIPTION

Our contractors range is designed with budget in mind. The contractors housing is universal and fits both 24" and 30" Lifebuoys, lifebuoys are held in place by way of a protruding plastic peg.

Also available separately or as part of a set is a housing door which offers further weather protection as well as keeping the enclosed lifebuoy and line out of site. Mounting options include a galvanised subsurface pole for fixing below ground level, a hard surface base plate pole for fixing to a hard surface or rail clamps for fitting directly to railings.



SPECIFICATION

Housing Material - High Density Polyethylene

Housing Weight - 6KG

External Diameter - 820mm


<u>Lifebuoy size</u> - Universal, fits both 24" & 30" Lifebuoys

Mounting options:

Galvanised Sub Surface Pole - 2000mm (L) x 60mm (W) x 40mm (D) 8.25Kg Galvanised Hard Surface Pole - 1500mm (L) x 60mm (W) x 40mm (D) 8.00Kg Rail Clamps - 2 x Galvanised U-Bolts , M10 Nuts & Washers

















MOUNTING OPTIONS

There are various mounting options depending on the ground or location that the housing will be situated, available options include the following:

Galvanised Sub-Surface Pole

For use with soft ground i.e. Grass

Galvanised Hard-Surface Pole

For fitting directly to a hard surface i.e. Concrete

Rail Clamps

For fitting the housing directly to railings

Wall Fixing

Fix directly to a wall, no fixings supplied
















LIFEBUOY EQUIPMENT

STANDARD LIFEBUOY HOUSING

Housing Sets

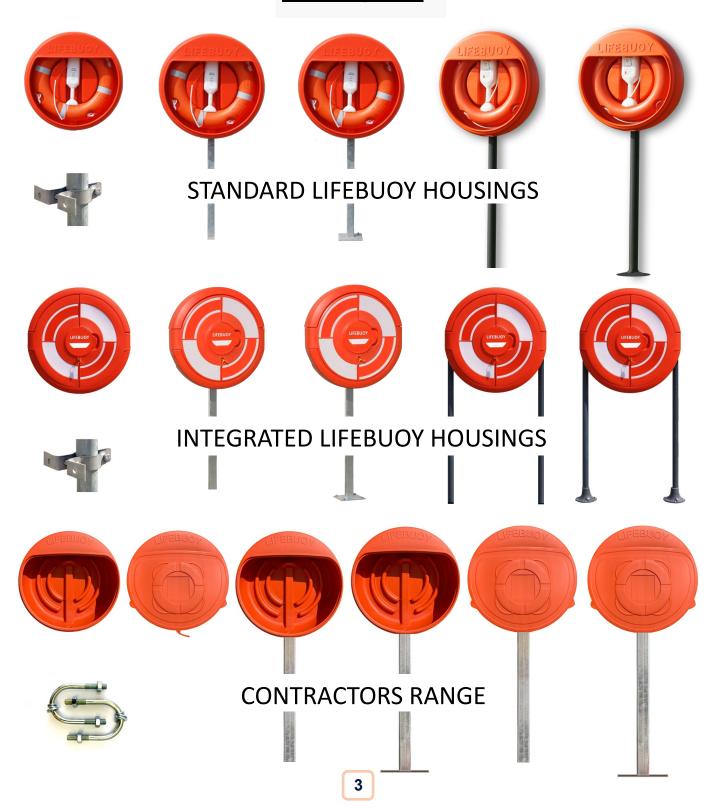
















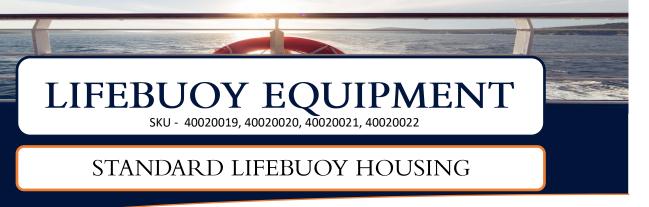

Lifebuoy mountings



Stainless Steel Lifebuoy Hook





Stainless Steel Lifebuoy 'Y' Bracket





Plastic Lifebuoy Snatch





