
I.C.Brindle & Co Ltd - Technical Data



SOLAS approved automatic lifebuoy light & Bracket. Activates automatically when the lifebuoy light overturns in the water. Air-tight sealed to prevent water intrusion.

Weighted to float in a vertical position — when used a 360 degree arc of light is automatically transmitted which last a minimum of 2 hours,. This piece of equipment is required by IMO / SOLAS regulations. Powered by 4 alkaline batteries .

Includes a 3m polyester cord for fitting and securing bracket .

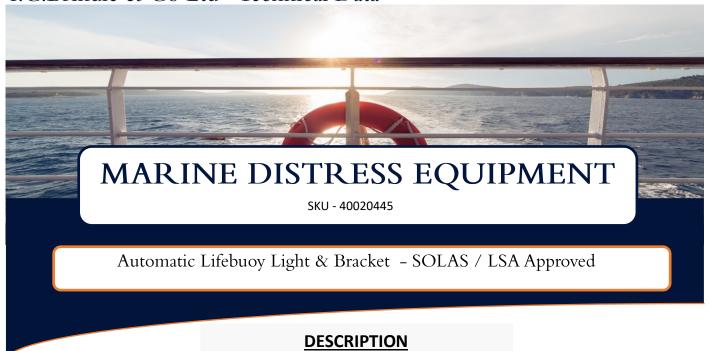

SPECIFICATION

- SOLAS / LSA Approved
- Automatic Switch
- 2cd output for 2 hour duration
- 3m polyester cord
- Length: 34cm
- Weight: .205kg / 205g
- 360 degree arc of light
- Powered by 4 alkaline batteries
- Air-tight sealed bulb cover
- Orange

1







