


# General Marine Equipment

SKU - 40020506

## Spray Stop Anti-Splashing Tape

Spray Stop Anti-Splashing Tape is an effective solution to prevent spray outs of hazardous liquids in the marine and offshore industry. The multilayer aluminium construction of the tape is designed to withstand the harsh marine environment and provides a durable barrier against spray outs.

For example, by using Spray Stop Anti-Splashing Tape, tubing systems in the marine and offshore industry can be made safer for workers and the environment. The tape can help prevent accidents and spills that can lead to injuries, damage to equipment, and environmental contamination.

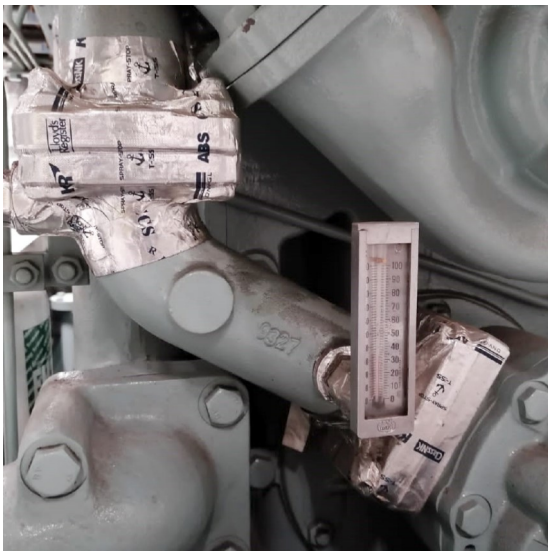

### KEY FEATURES

- High-tech, laminated multilayer aluminium construction
- Specifically designed for use in the marine and offshore industry
- Prevents spray-outs of hazardous liquids such as oil and fuel
- Complies with SOLAS regulations for flammable oil protection
- Reduces the risk of accidents and spills
- Helps prevent fires, explosions, and other dangerous situations
- Protects workers and the environment from harm
- Durable construction withstands harsh marine environments
- Easy to apply and use on tubing systems.

1



# General Marine Equipment

SKU - 40020506

## Spray Stop Anti-Splashing Tape

### SPECIFICATION

- Constructed with high-tech, laminated multilayer aluminium
- Specifically engineered for marine and offshore applications
- Prevents spray-outs of hazardous liquids such as oil and fuel
- Complies with SOLAS regulations for flammable oil protection
- Minimises the risk of accidents and spills
- Helps prevent fires, explosions, and other hazardous situations
- Protects workers and the environment from harm
- Durable construction ensures long-lasting performance in harsh marine environments
- Easy to apply and use on tubing systems, simplifying maintenance and repairs.

### TECHNICAL INFORMATION

- Withstands maximum pressure of 15 bar
- Can tolerate temperatures up to +160 °C continuously / +200 °C shortly
- Adhesive material can tolerate temperatures ranging from – 70 °C to 200 °C
- Provides adhesion of 1000 g / 25 mm
- Shelf life of 3 years

Article number	Description	Dimensions	Weight	Packing Unit	IMPA
SPST50035	Spray Stop Tape	35 mm x 10 m	0.13 kg	58 rolls	871801
SPST50050	Spray Stop Tape	50 mm x 10 m	0.19 kg	40 rolls	871802
SPST50075	Spray Stop Tape	75 mm x 10 m	0.28 kg	24 rolls	871808
SPST50100	Spray Stop Tape	100 mm x 10 m	0.38 kg	20 rolls	871804
SPST50140	Spray Stop Tape	140 mm x 10 m	0.53 kg	14 rolls	871803
SPST50140	Spray Stop Tape	250 mm x 10 m	0.94 kg	8 rolls	871807
SPST50500	Spray Stop Tape	500 mm x 10 m	1.88 kg	4 rolls	871805
SPST51000	Spray Stop Tape	1000 mm x 10 m	3.75 kg	2 rolls	871806