

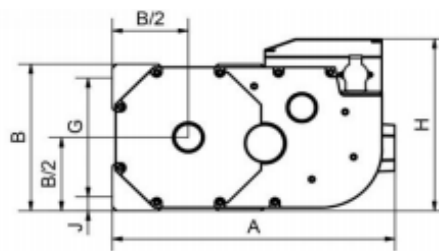



SB Rescue Sling Accessories

TRBoxter INOX Stainless Steel Winch – 250Kg

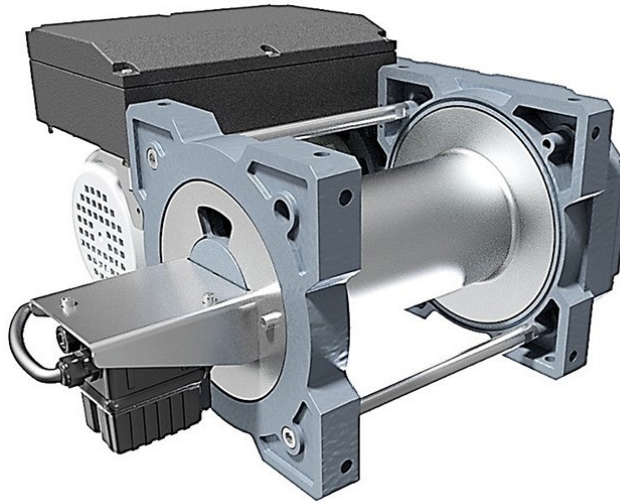

- Range of electric winches designed for simple lifting and pulling applications in a corrosive environment.

Technical properties

- Stainless steel drum (316 L).
- Very low voltage control ensuring user protection against electric risks.
- Aluminium casing (coated with marine paint C4).
- Up-down pendant control with emergency stop, cable 3 m long.
- Single phase motor brake 230 V or three-phase motor brake 230/400 V, 50 Hz, lifting type, P = 1.1 kW. Isolation F. IP 66.
- Reducer in oil bath with helical gears.
- Mechanically welded drum with wide flanges for allowing a secure fastening of the wire rope.
- Lengthened drum on request.
- Limit switch IP 66/67 in option.
- Rope press roll, rope slack switch and grooved drum on request.
- Many adaptable options (contact us).

TRBOXTER

Technical characteristics of TRBoxter INOX stainless steel version 250 kg

References	TRBoxter 251 BT
Capacity 1st layer kg	300
Capacity top layer kg	250
Nb of layers	3
Wire rope cap. 1st layer m	15
Wire rope cap. top layer m	54
Wire rope Ø mm	5
FEM	1Am
Motor kW	1,1
Power	1 Ph - 230 V or 3 Ph - 230/400 V
Weight (without cable) kg	55
Speed top layer m/mn	22
Speed 1st layer m/mn	19

Dimensions

References	TRBoxter 251 BT
A mm	452
B mm	243
C mm	79
D mm	118
E mm	255
F mm	10,5
G mm	197
H mm	284,5
J mm	23
K mm	356
L mm	545 (with limit switch)
T mm	230



SB Rescue Sling

Accessories

TRBOXTER

