


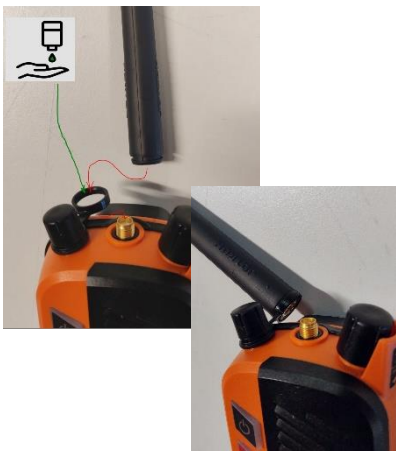

TECHNICAL BULLETIN TB12-2021

17th November 2021





Assembly of antenna and labelling (after delivery)

1. Antenna Assembly

		
<p>Antenna is not pre-assembled with the radio when delivered from the factory and will need to be mounted.</p>	<p>Before antenna is fully mounted it will need be assembled with the rubber ring holding the headset socket cover. Use a drop of liquid soap on the ring before assembly.</p>	<p>Then carefully screwed in place, without overtightening (as shown above).</p>

2. Affix Primary Battery Expiry Label & Call Sign and Ship Station Identity Label

	
<p>Battery expiry label should be attached to the top of the primary battery, as seen above.</p>	<p>Call Sign and Ship Identity label should be fitted on the right hand side of the radio, as seen in example above.</p>

For more information, please contact at [Jotron Support](#)